


**"SF" SERIES SOLAR FLASHINGS**

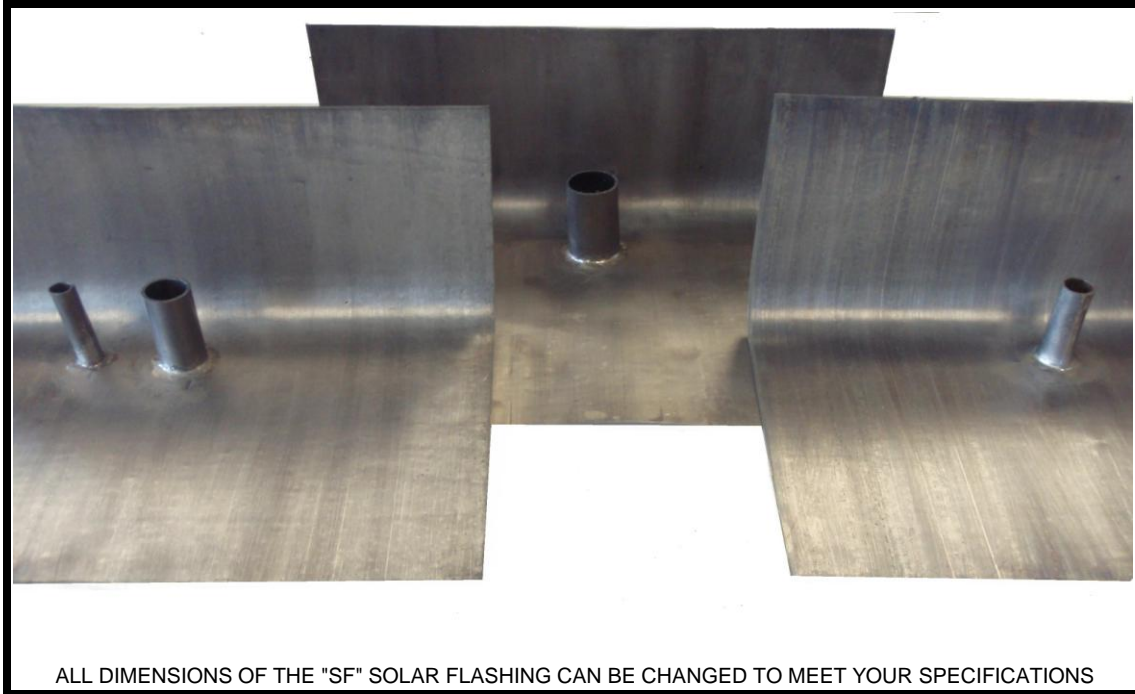

**CONSTRUCTION CHARACTERISTICS OF THE "SF" SERIES SOLAR FLASHING**

SANTA ROSA LEAD PRODUCTS (SRLP) MANUFACTURES AN ALL-LEAD FLASHING FABRICATED FROM PURE LEAD THAT MEETS **ASTM B749 COPPER BEARING** AND FEDERAL SPECIFICATION **QQ-L-201f**. THE STANDARD FLASHING CONSISTS OF A **CYLINDRICAL (TUBE) RISER** WHERE A STEEL-REINFORCED BOOT IS NOT REQUIRED.

STANDARD SOLAR FLASHINGS ARE AVAILABLE IN **2.5# LEAD** ON A **12"x12" BASE** WITH A **2"-TALL RISER**. SOME MODELS OF THE "SF" SERIES SOLAR FLASHINGS ALSO HAVE AN EXTRA **3/8" I.D. RISER** TO ACCOMMODATE SENSOR WIRE(S). "SF" SERIES SOLAR FLASHINGS CAN ALSO BE MADE OF **4# LEAD**, IF REQUESTED.

OTHER BASE SIZES AND RISER HEIGHTS CAN EASILY BE MANUFACTURED UPON REQUEST. "SF" SERIES SOLAR FLASHINGS CAN ALSO BE MADE PRE-CUT TO A PITCH IF REQUIRED, ALTHOUGH MOST SOLAR APPLICATIONS ARE 90-DEGREES TO THE ROOF (FLAT PITCH).

**STOCK SIZES INCLUDE (OTHER SIZES AVAILABLE UPON REQUEST):**

5/8" I.D. ( <b>SF5/8</b> )	3/4" I.D. ( <b>SF3/4</b> )	1.0" I.D. ( <b>SF1</b> )
1-1/4" I.D. ( <b>SF1-1/4</b> )	1-1/2" I.D. ( <b>SF1-1/2</b> )	1-3/4" I.D. ( <b>SF1-3/4</b> )
2.0" I.D. ( <b>SF2</b> )	3/4" I.D. x2 ( <b>SFHC2</b> )	3/4" I.D. w/ SENSOR WIRE ( <b>SF3/4+WIR</b> )
3/4" I.D. x2 w/ SENSOR WIRE ( <b>SFHC</b> )	1.0" I.D. x2 w/ SENSOR WIRE ( <b>SFD1+WIR</b> )	

**WHEN PROPERLY INSTALLED, THE "SF" SERIES SOLAR FLASHING  
WILL LAST THE LIFE OF ANY ROOFING SYSTEM!**